

PFI-C425 Thermal Monocular Camera



Key Features

- Vanadium oxide uncooled focal plane detector.
- Ultra-low power consumption.
- Connects to the mobile app through Wi-Fi.
- Calculates distance using video analysis.
- Lightweight and portable.
- Picture in picture.
- Impact resistance reaches up to 1,000 g/1 ms.
- RAR (Recoil Activated Recorder).
- 1440 × 1080 OLED screen.
- Metal housing.
- IP67 rated.



Technical Specification

Thermal			
Detector Type	Vanadium oxide uncooled focal plane detector		
Effective Pixels	384 (H) × 288 (V)		
Pixel Pitch	12 µm		
Spectral Range	8 μm–14 μm		
Sensitivity (NETD)	≤30 mK@f/1.0, 25°C		
Focal Length	25 mm		
Aperture	F1.0		
Field of View	H: 11.0°; V: 8.2°		
Focus Control	Fixed		
Close Focus Distance	2 m (6.56 ft)		
Detection Distance	1,300 m (4,265.09 ft)		
Magnification	2.1×		
Frame Rate	50 Hz		
Display			
Screen	1440 × 1080, 0.41 inch, OLED		
Color Palettes	6 (white hot/black hot/iron red/alarm/emerald/amber)		
Video Compression	H.264		
Diopter Adjust	-5 D to +5 D		
Eye Relief	44 mm (1.73")		
Exit Pupil	6 mm		
Function			
Digital Zoom	1x; 2x; 4x; 8x		
Reticle	Multiple Patterns & Color Options		
Zeroing	Yes		
Video Recorder	Yes		
Snapshot	Yes		
WiFi Hotspot	Yes		
Hot Spot Track	Yes		
Video Distance Measurement	Yes		
FFC Calibration	Auto; manual; immediately		
Standby Mode	Yes		
PIP (Picture in Picture)	Yes		
DPC (Defective Pixel Correction)	Yes		
RAR (Recoil Activated Recorder)	Yes		




MIC	Yes		
Storage	Built-in 16 GB		
Power			
Battery Type	Replaceable and rechargeable 18650 battery		
Battery Life	7.5 h@25 °C		
Power Supply	5 VDC/1 A		
Port	USB Type-C		
Anti-reverse Battery Connection	Yes		
Overvoltage Protection	Yes		
General			
Operating Temperature	-30 °C to +55 °C (-22 °F to +131 °F)		
Operating Humidity	≤95%		
Max. Recoil	1,000 g/1 ms		
Protection Grade	IP67		
Packaging Dimensions	267 mm × 227 mm × 116 mm (10.51" × 8.94" × 4.57") (L × W × H)		
Product Dimensions	180.8 mm × 64.1 mm × 87.7 mm (7.12" × 2.52" × 3.45") (L × W × H)		
Gross Weight	1 kg (2.20 lb)		
Net Weight	≤460 g (1.01 lb) (battery excluded)		

Ordering Information


Туре	Model	Description
Thermal Monocular Camera	PFI-C425	Thermal Monocular Camera




Installation

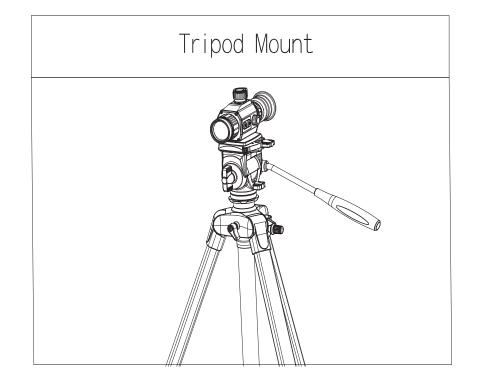

Dimensions (mm[inch])

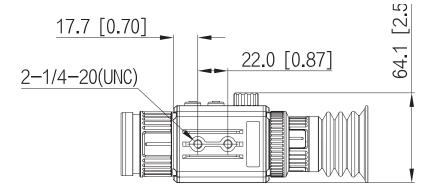





Rev 001.000 © 2023 Pixfra. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.